

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/091238 A1

(51) International Patent Classification⁷: **H04Q 7/36**,
H04B 7/26

(21) International Application Number:
PCT/IB2004/050354

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03110415.0 11 April 2003 (11.04.2003) CN

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SUN, Li [CN/CN];
Philips Electronics China, 21/F Kerry Office Building, 218
Tian Mu Xi Road, Shanghai 200070 (CN). LI, Yueheng
[CN/CN]; Philips Electronics China, 21/F Kerry Office
Building, 218 Tian Mu Xi Road, Shanghai 200070 (CN).

(74) Common Representative: KONINKLIJKE PHILIPS
ELECTRONICS N.V.; c/o Van Der Veer, Johannes, L.,
Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,
PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM,
ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD,
SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY,
KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG,
CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT,

[Continued on next page]

(54) Title: A METHOD AND APPARATUS FOR SUPPORTING P2P COMMUNICATION IN TDD CDMA COMMUNICATION SYSTEMS

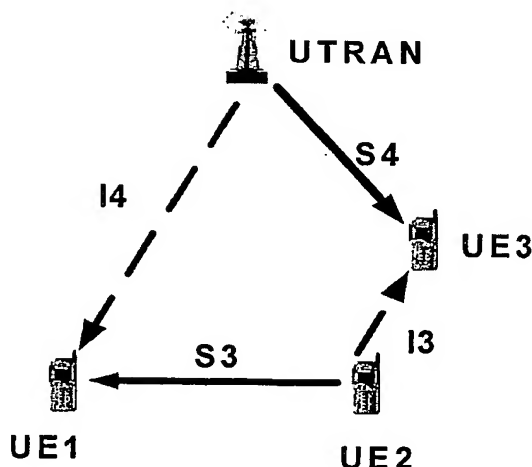

(57) Abstract: A method for supporting P2P communication between two user equipments in TDD CDMA systems, performed by user equipment, comprising: receiving signals transferred via the downlink control channel from network system; acquiring the timeslot allocation information and the spreading code allocation information of other active user equipments allocated in the specific downlink timeslot associated with the direct link used by said user equipments, according to the received signals; and synchronizing the P2P communication signals received by the user equipment and signals from network system, according to the acquired timeslot allocation information and spreading code allocation information, so as to reduce the interference caused by the downlink signals transmitted from network system to other user equipments during the P2P communication process.



LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

AP20 Rec'd PCT/PTO 00 MAY 2006

A METHOD AND APPARATUS FOR SUPPORTING P2P COMMUNICATION IN TDD CDMA COMMUNICATION SYSTEMS

Field of the Invention

5 The present invention relates to a method and apparatus for supporting P2P communication in TDD CDMA (Time-Division-Duplex Code-Division-Multiple-Access) communication systems, and more particularly, to a method and apparatus for reducing interference caused by conventional communication signals to a UE (user equipment) during P2P communication process in TDD
10 CDMA communication systems.

Background Art of the Invention

15 In conventional cellular mobile communication systems, a UE (user equipment) has to communicate with another UE only through the relaying of base stations even if the two UEs are very close to each other. Fig. 1 illustrates the conventional communication mode. However, in some cases when the distance between two UEs who camp on the same cell is very close, it can be a more reasonable way for them to communicate directly, rather than through the relaying of base stations. This method is the so-called peer-to-peer communication, abbr. as P2P.
20

 Fig. 2 illustrates the P2P communication between two UEs. Referring to Fig. 2, assume that the two UEs are camping in the same cell and the distance between them satisfies the requirement for establishing P2P connection, the dashed line represents signaling link between the UTRAN and the UE during P2P communication, the solid line for data link between the two UEs, and the arrowhead for direction of information flow. It can be obviously seen from the figure that only signaling link exists between the UTRAN and the UE, while only data link exists between the two communicating UEs. If additional signal overhead for management is ignored, P2P communication can save about 50% radio resource
25 during the process of direct link. Furthermore, control channels are reserved between the UTRAN and the UEs, so wireless network operators still holds control
30 through the base station over how the UEs utilize radio resources.

It is commonly accepted that a Time Division Duplex (TDD) air interface is a communication standard that offers a more flexible adaptation to different uplink and downlink traffic requirements. Among existing 3G systems based on TDD communication mode, TD-SCDMA (Time Division – Synchronization Code Division Multiple Access) system is the most suitable system for the combination of P2P communication with conventional communication mode, because the same carrier frequency is applied in both uplink and downlink communications, which can simplify the RF (Radio Frequency) module of the mobile terminal.

In a TD-SCDMA system that is capable of employing P2P communication mode, the DIRECT mode is introduced to describe the direct communication between two UEs, besides two other working modes – IDLE mode and CONNECT mode defined in conventional TD-SCDMA system. The communication link in direct mode can be defined as FORWARD link (e.g.: the link from UE1 to UE2) and BACKWARD link (e.g.: the link from UE2 to UE1) identified according to the information flow direction for one UE to send signals to the other UE or receive signals from the other UE. Because P2P communication mode is constructed in combination with existing TD-SCDMA systems, the UTRAN, the P2P UEs and other conventional UEs allocated in the same timeslot can overhear the information transferred on the FORWARD link or BACKWARD link, i.e.: from the view of the UTRAN, even though the UEs have no connection with the UTRAN, the FORWARD link and BACKWARD link are associated with a certain uplink timeslot or downlink timeslot (the FORWARD link and BACKWARD link can correspond to different uplink timeslot or downlink timeslot depending on different resource allocation schemes). Hence P2P communication will cause signal interference to conventional communication. Similarly, two P2P UEs can also overhear the information transferred in the uplink timeslot or downlink timeslot associated with its FORWARD link or BACKWARD link during P2P communication. Therefore, when conventional links share the same timeslots with the P2P links, conventional uplink or downlink communication will interfere with the communication of the P2P FORWARD link or BACKWARD link, which seriously deteriorates the performance of P2P-enabled TDD CDMA communication systems.

To improve the performance of P2P-enabled TDD CDMA communication

systems, it's necessary to effectively reduce the signal interference caused by P2P communication mode to the TD-SCDMA communication systems.

First of all, analysis will go to the interference signal brought by introducing P2P communication mode in the following, and then how to reduce interference signal will be described. For simplicity in the following, the timeslot in which one UE transmits signals to the other UE through the above FORWARD link or BACKWARD link is called transmit timeslot (Tx timeslot), while the timeslot in which the UE receives signals from said another UE through the above FORWARD link or BACKWARD link is called receive timeslot (Rx timeslot), wherein the Tx timeslot or Rx timeslot is associated with an uplink timeslot or downlink timeslot in the sub-frame in conventional communication respectively.

1. Interference associated with uplink timeslot between P2P link and conventional link

Figure 3 illustrates the interferences between P2P link and conventional link in P2P-enabled TD-SCDMA systems when the P2P link is associated with uplink timeslot. As shown in Fig.3, it is assumed that UE1 and UE2 work in P2P mode and UE3 works in conventional mode, wherein UE1's Tx timeslot is associated with UE3's uplink timeslot, that is, UE1 and UE3 are allocated in the same uplink timeslot to transmit signals respectively to UE2 and the UTRAN. S1 is the information from UE1 to UE2 through direct link (taken as FORWARD link) and S2 is uplink information from UE3 to the UTRAN through uplink, moreover, S1 and S2 are associated with the same uplink timeslot but with different spreading codes.

In TD-SCDMA communication systems, one of the most important features is to maintain uplink synchronization, which means signals from different UEs should arrive at the UTRAN at the same time to guarantee the orthogonality of the spreading codes of signals from the main paths of different UEs.

For conventional communication systems, the UTRAN monitors and controls the UEs' uplink transmitting timing via a specific traffic burst structure in CONNECT mode so as to maintain uplink synchronization for each UE. But for P2P communication mode, the UTRAN is only involved in P2P link establishment procedure and not involved in the P2P communication procedure after P2P link's establishment. Therefore, during P2P communication, there is no dedicated

channel between the UTRAN and the two P2P UEs, so the UTRAN cannot adjust the uplink synchronization advance for the two P2P UEs transmitting signals by using specific traffic burst to maintain uplink synchronization even if it can overhear and estimate the uplink synchronization shift of the two P2P UEs.

5 Referring to Fig. 3, when UE1 and UE3 transmit signals in the same uplink timeslot, the UTRAN can overhear information S1 transferred from UE1 to UE2 (to the UTRAN, S1 is considered as interference signal I1). But as described above, there is no dedicated channel between the UTRAN and UE1, so the UTRAN can't adjust UE1's transmission timing by using the traffic burst in conventional
10 communication mode even if it can overhear information S1 and estimate UE1's synchronization shift information, which means UE1 working in P2P mode may lose uplink synchronization with the UTRAN (UE3 working in conventional mode can maintain uplink synchronization with the UTRAN with conventional mode). That is, I1 and S2 are likely to reach the UTRAN unsynchronously, which will
15 potentially impair uplink synchronization and thus degrade the system performance.

Similarly, when UE1 and UE3 transmit signals in the same allocated uplink timeslot, UE2 can also overhear signal S2 transferred from UE3 to the UTRAN (to UE2, S2 is considered as interference I2), and interference signal I2 will also
20 produce impact on UE2's receiving S1, which may potentially impair the P2P communication quality.

2. Interference associated with downlink timeslot between P2P link and conventional link

Figure 4 illustrates the interferences between P2P link and conventional link
25 in a P2P-enabled TD-SCDMA system when the P2P link is associated with downlink timeslot. It is assumed that UE1 and UE2 work in P2P mode and UE3 works in conventional mode, wherein UE1's Rx timeslot is associated with UE3's downlink timeslot, that is: UE1 and UE3 are allocated in the same downlink timeslot to respectively receive signals from UE2 and the UTRAN. S3 is the P2P link information from UE2 to UE1 via direct link (taken as BACKWARD link) and S4
30 is downlink information from the UTRAN to UE3 via downlink, furthermore, S3 and S4 are associated with the same uplink timeslot but with different spreading codes.

In Fig. 4, the downlink information S4 transmitted from the UTRAN to UE3 may produce interference to other UEs who share the same downlink timeslot with UE3 but use different spreading codes to receive signals. Such interference is called multi-access interference (MAI).

5 Referring to Fig. 4, when UE1 and UE3 receive signals in the same allocated downlink timeslot, UE1 can overhear information S4 transferred from the UTRAN to UE3 via downlink (to UE1, S4 is considered as interference signal I4), and generally the transmission power of signals from the UTRAN is relatively strong, so the interference signal I4 is likely to impair the direct communication quality
10 seriously.

Similarly, when UE1 and UE3 receive signals in the same allocated downlink timeslot, UE3 can also overhear information S3 transferred from UE2 to UE1 (to UE3, S3 is considered as interference signal I3, and meanwhile UE2 can be taken as the pseudo-UTRAN of transmission information in downlink timeslot), and the
15 interference signal I3 will impair the communication quality of UE3 near UE2 and other UEs in the same timeslot as UE3 to receive signals.

3. Interference between P2P direct link pairs

Figure 5 illustrates the interferences between two P2P direct link pairs in a P2P-enabled TD-SCDMA system, wherein a UE in one of the two P2P link pairs receive transmit signals to another UE in another P2P link pair. Assume that UE1
20 and UE2 work in one P2P link pair while UE3 and UE4 in another P2P link pair.

Because the P2P link pairs are symmetrical, in the associated timeslot, signal S5 or S6 from UE1 to UE2 will become interference I5 or I6 to UE4 who is receiving signals from UE3. Obviously these interferences may also greatly impair
25 the direct communication quality.

As noted above, after P2P link is introduced in conventional TD-SCDMA systems, there exist 6 possible interference signals I1, I2, I3, I4, I5 and I6. Depending on whether the UTRAN is involved, the above 6 interference signals can be divided into two types. The first type includes interferences between the
30 UEs, such as I2, I3, I5, and I6; and the second type includes the interferences with UTRAN involved, such as I1 and I4.

To guarantee the communication quality of a P2P-enable TD-SCDMA

communication system, effective methods needs to be researched to cancel the above 6 interferences (it's better to achieve that without changing the physical layer structure of existing communication systems). Among the above 6 interference signals, the first type can be reduced or cancelled by efficiently limiting the radio range supported by P2P and adopting intelligent radio resource control scheme, while interference signal I1 can be cancelled as described in a patent application entitled "A Method and Apparatus for Uplink Synchronization Maintenance with P2P Communication in Wireless Communication Networks," filed by KONINKLIJKE PHILIPS ELECTRONICS N.V., on March 7, 2003, Attorney's Docket No. CN030004, Application Serial No. 03119894.5, the disclosures of which are hereby incorporated by reference. As for interference signal I4 of the second type, there is no effective solution yet now.

From the foregoing interference analysis, it can be seen that interference signal I4 is introduced by the UTRAN's transmitting signals to UE3 via the downlink to UE1 in the same downlink timeslot as UE3. Usually, the signal transmission power of the UTRAN is relatively strong enough that all UEs sharing the same downlink timeslot in the same cell can overhear the signal transmitted, and moreover the signal is the mixed one including redundant information of many other UEs, hence, I4 can't be ignored. In UE1, UE1 must adopt MUD (multi-user detection) or JD (joint detection) to cancel the interference signal, so as to guarantee the direct communication quality.

Summary of the Invention

The object of the present invention is to provide a method and apparatus for supporting P2P communication in TDD CDMA communication systems, so as to reduce interferences to the UE caused by downlink signal from conventional communication transmitted in the same downlink timeslot as the UE during direct communication.

To achieve the above object, a method for supporting a UE to perform P2P communication in TDD CDMA communication systems in accordance with the present invention, comprising: receiving signals transferred by network system via downlink control channel; acquiring the timeslot allocation information according to

the received signals; acquiring the spreading code allocation information of other active UEs allocated in the specific downlink timeslot associated with the direct link used by the UE, according to the signals transferred via downlink control channel; and reducing the interference to the UE caused by downlink signals in conventional communication during P2P communication, according to the
5 acquired timeslot allocation information and spreading code allocation information.

A method for supporting P2P communication between two UEs, performed by network system, in TDD CDMA communication systems in accordance with the present invention, comprising: sending the timeslot allocation information to the
10 two P2P UEs via downlink control channel; generating spreading code allocation information corresponding to each downlink timeslot in said timeslot allocation information; and sending the said spreading code allocation information to these two UEs respectively so as to synchronize the P2P communication signal of each of the two UEs with the signals from network system.

15

Brief Description of the Accompanying Drawings

Fig. 1 is a schematic diagram illustrating two UEs communicate through the relaying of base stations in conventional communication mode;

Fig. 2 is a schematic diagram illustrating the P2P communication mode
20 between two UEs;

Fig. 3 is a schematic diagram illustrating the generation of interference signals between direct link and conventional link employing uplink timeslot to communicate, in a P2P-enabled TD-SCDMA system;

Fig. 4 is a schematic diagram illustrating the generation of interference
25 signals between direct link and conventional link employing downlink timeslot to communicate, in a P2P-enabled TD-SCDMA system;

Fig. 5 is a schematic diagram illustrating the generation of interference signals between two direct link pairs in a P2P-enabled TD-SCDMA system;

Fig. 6 is a schematic diagram illustrating the timeslot allocation information in
30 accordance with the present invention;

Fig. 7 is a schematic diagram illustrating the spreading code allocation information in accordance with the present invention;

Fig. 8 is a schematic diagram illustrating the time relationship between receiving downlink signals from the UTRAN and that from UE2 respectively at UE2 and UE1 with the UTRAN as the time benchmark when downlink timeslot is employed to communicate;

5 Fig. 9 is a schematic diagram illustrating the method to be performed in the present invention for downlink synchronization for an Rx UE in direct mode.

Detailed Description of the Invention

10 According to the analysis to interference signals in a P2P-enabled TD-SCDMA communication system as above, the present invention primarily focuses on addressing the problem of interference signals from conventional downlink for a Rx UE in P2P communication.

15 In fact, an advanced receiver has been widely used in the UTRAN of TD-SCDMA communication systems, i.e. using MUD or JD method to cancel MAI interference, as disclosed in detail in the article entitled "Multi-user Detection for DS-CDMA Communication," written by S.Moshavi, in *IEEE Commun. Mag.*, Oct. 1996, page 124-136, and the article entitled "Zero forcing and minimum mean-square-error equalization for multiuser detection in code division multiple access channels," written by A. Kelein, G. K. Kaleh, in *IEEE Trans. Vehicular*
20 *Tech.*, Vol. 45, No. 2, May 1996, pp 276-287, the disclosures of which are hereby incorporated by reference. But to apply interference canceling method like MUD or JD in the receiver of a UE, two conditions needs to be satisfied in advance:

1. acquire the spreading code information of all active UEs allocated in the same timeslot as the UE;
- 25 2. when receiving signals from direct link, the UE in direct mode should maintain synchronization with associated downlink signals from the UTRAN (the complexity of implementing the receiver can be effectively simplified only with signal synchronization).

Discussions will respectively be given below to the above two conditions:

- 30 1. How to obtain spreading code allocation information

In a TD-SCDMA communication system taken as an example, the spreading codes used by all active UEs are controlled by the base station subsystem

UTRAN. During communication, RF signals convey information in form of frame. Every RF frame is divided into two sub-frames, and every sub-frame has 7 timeslots. Each UE allocated in the same timeslot transmits or receives signals using different spreading code allocated by the base station subsystem. Downlink control channel such as BCCH (Broadcast Control CHannel), has fixed position in each radio frame or sub-frame, and a UE can receive information from downlink control channel no matter working in conventional mode or P2P mode, so the UE can obtain the spreading code allocation information of all UEs sharing the same timeslot, according to the control information transferred from the UTRAN via downlink control channel.

Wherein spreading code allocation information includes two parts: (i) the timeslot allocation information in each frame or sub-frame about whether each timeslot is to be used in uplink or downlink; (ii) the spreading code allocation information associated with each allocated downlink timeslot.

In the embodiments of the present invention, the above timeslot allocation information and spreading code allocation information respectively store the involved information into the corresponding timeslot allocation map and spreading code allocation map through mapping, especially:

(1) About the timeslot allocation information

In a TD-SCDMA communication system taken as an example, each sub-frame has 7 timeslots, denoted as TS0-TS6, so an octet with 8 bits can be used to map the 7 timeslots in a sub-frame in timeslot allocation map.

Wherein a timeslot corresponds to a bit in the octet. As Fig. 6 shows, TS0-TS6 respectively corresponds to Bit6-Bit0 in the octet, while Bit7 is reserved. For each bit in Bit6-Bit0, assume that its corresponding timeslot is to be used as downlink timeslot when it is 1, and as uplink timeslot when it is 0. In TD-SCDMA systems, TS0 is always allocated as downlink and TS1 as uplink, so let Bit6=1 and Bit5=0.

(2) About the spreading code allocation information associated with each allocated downlink timeslot

After the timeslots in an RF frame or sub-frame are allocated, the UTRAN can accordingly generate the spreading code allocation information associated with

each associated downlink timeslot according to the downlink timeslots included in the sub-frame. A TD-SCDMA system is also taken as an example in the following.

In this communication system, a downlink timeslot may have totally up to 16 spreading codes for different UEs or different codes in one UE to use. So 16 bits
5 are needed to represent how each spreading code in a downlink timeslot is used, that is, two octets are needed to represent the spreading code allocation information. It can be learnt from the foregoing description that TS1 is always used as uplink in the 7 timeslots included in each sub-frame, therefore at most 6 timeslots in each sub-frame can be used as downlink, thus totally 12 octets are
10 needed to represent how the spreading codes of the 6 timeslot are used.

The following embodiment will describe the spreading code allocation information included in a downlink timeslot. Assume that Bit4=0 and Bit1=0 in the timeslot allocation map shown in Fig. 6, that is, TS2 and TS5 are used as downlink timeslots, 4 octets are required to be included in the spreading code allocation
15 map that corresponds to Fig. 7. Wherein the first two octets correspond to the allocation information of each spreading code in TS2 and the second two octets correspond to that in TS5. The part with lighter background color indicates the first two octets, wherein Bit15~Bit0 respectively correspond to the information about spreading codes Code15~Code0 in TS2 to be used by 16 UEs or codes at most;
20 while the part with deeper background color indicates the second two octets, wherein Bit15~Bit0 respectively correspond to the information about spreading codes Code15~Code0 in TS5 to be used by 16 UEs or codes at most. To each bit of the four octets in the above two groups corresponding to each spreading code, it can be defined as: when the bit corresponding to the spreading code is 1, it
25 represents that the spreading code is used by a UE in the corresponding timeslot; when the bit corresponding to the spreading code is 0, it represents that the spreading code is not allocated to any UE in the corresponding timeslot yet. For instance, when Bit8 and Bit0 of the two octets in the first group are 1 while other bits are all 0, it represents only the spreading codes corresponding to Bit8 and Bit0
30 are occupied in TS2 corresponding to the first group, while other spreading codes are not allocated to any UE yet.

As described above, through mapping the allocation information of each timeslot in the sub-frame and the allocation information of each spreading code included in each downlink timeslot in the sub-frame into the timeslot allocation map and spreading code allocation map, the UTRAN can send the information included
5 in the timeslot allocation map and spreading code allocation map to each UE via downlink control channel, so that the UE can obtain the timeslot allocation information and the spreading code allocation information associated with downlink timeslot.

Of course, the UE can also obtain the timeslot allocation information and the
10 spreading code allocation information associated with uplink timeslot in a similar way, if needed.

2. Maintain synchronization with associated downlink signals from the UTRAN when a UE in direct mode is receiving signals from direct link

In conventional TD-SCDMA systems, the downlink mixed signals transmitted
15 by the UTRAN should reach the UE synchronously if the multi-path delay effect is ignored. But in a P2P-enabled TD-SCDMA system, there is great difference between the transmission path of the useful signal S3 from a P2P UE and that of the interference signal I4 from the UTRAN (referring to Fig. 4), so their arriving time may be quite different, i.e.: when UE1 in direct mode is receiving signal S3
20 over direct link, it can't be guaranteed to keep synchronization with downlink signal I4 from the UTRAN. In this case, S3 and I4 can't arrive at UE1 at the same time, so the complexity of implementing channel estimation or JD (joint detection) will be increased greatly due to time unsynchronization although conventional JD method can still be employed to cancel interference signal I4 in UE1, even if UE1 can
25 obtain the timeslot allocation information and spreading code allocation information transmitted by the UTRAN via downlink control channel.

To greatly simplify the operation of the receiver in UE1 and effectively cancel downlink interference signal I4, how to implement synchronization between direct link signal S3 and interference signal I4 at Rx UE1, arises as an important step to
30 guarantee P2P communication quality.

As Fig. 4 shown, in the case that the useful signal S3 and interference signal I4 can't arrive at UE1 synchronously, there are two methods for them to arrive at

UE1 synchronously: the first is to adjust the TA for the UTRAN to transmit signal I4 so that signal I4 transmitted by the UTRAN and signal S3 transmitted by UE2 can arrive at UE1 synchronously; the second is to adjust the TA for UE2 to transmit signal S3 so that signal S3 transmitted by UE2 and signal I4 transmitted by the UTRAN can arrive at UE1 synchronously. Wherein it's impossible to realize the first method by adjusting the UTRAN's transmission TA for I4 and S3 to arrive at UE1 synchronously, because there are usually several P2P link pairs using the same downlink timeslot during communication process, which can't guarantee downlink interference signal I4 to be synchronized with signals (e.g. S3) received by the UEs in P2P communication just by adjusting a common transmission TA for the UTRAN to transmit signals. So, the TA adjustment must be done at UE2 for transmitting useful signal S3 to guarantee that each UE in direct mode can maintain synchronization with the associated downlink signals from the UTRAN when receiving signals from different direct links.

Before describing the above synchronization procedure in conjunction with Fig. 8, two issues need to be clarified in advance:

(i) Establish and maintain synchronization with the UTRAN in conventional communication mode

During cell search phase, each UE firstly establishes downlink synchronization with the UTRAN in conventional way, and then maintains downlink synchronization with the UTRAN by tracking the pilot channel in the sub-frame and taking the detected pilot channel as the time reference in its sub-frame.

(ii) Maintain synchronization with associated downlink timeslots in P2P communication mode

When UE1 and UE2 are in P2P direct mode, there is a dedicated channel between them, and the traffic burst structure of the dedicated channel is the same as that in conventional TD-SCDMA communication systems, which means that the power control information and synchronization shift information are also included in the traffic bursts of FORWARD link and BACKWARD link in the P2P dedicated channel. In conventional TD-SCDMA communication systems, the synchronization shift information included in traffic burst can be used to maintain uplink synchronization at the UTRAN, similarly the synchronization shift information

included in traffic burst of direct link can be used by the P2P UEs to maintain synchronization with associated conventional downlink when receiving direct link signals in P2P communication.

From the above clarification it can be seen that each UE respectively
5 establishes downlink synchronization with the UTRAN in conventional way at the beginning of communication establishment (cell search phase), so two UEs can have a common time benchmark when establishing P2P communication, to determine synchronization between direct link signals and downlink signals. Meanwhile, the traffic burst of P2P dedicated channel contains the same
10 synchronization shift information as in conventional mode, so the UE can set and adjust its signal transmission TA by using the synchronization shift information during P2P establishment and communication procedure, to guarantee synchronization between direct link signals and downlink signals.

Descriptions will be given below to synchronization procedure between direct
15 link signals and downlink signals at the Rx UE, in conjunction with Fig. 8 and Fig. 4, wherein for UE1 the useful signal S3 and interference signal I4 share the same downlink timeslot.

First, taking the UTRAN as the common benchmark, the time relationship between the receiving time for each UE to receive signals and the common
20 benchmark at the UTRAN is illustrated in Fig. 8. T_0 is the downlink transmitting time benchmark in the associated downlink timeslot at the UTRAN, T_1 and T_2 are the related receiving time points at UE1 and UE2 respectively. UE1 and UE2 can identify T_1 and T_2 by finding and tracking the pilot channel from the UTRAN as described above. The durations $T_{\text{UTRAN-UE2}}$ (equal to $T_2 - T_0$) and $T_{\text{UTRAN-UE1}}$ (equal
25 to $T_1 - T_0$) are signal transmission time from the UTRAN to UE1 and UE2 respectively. $T_{\text{UE2-UE1}}$ (equal to $T_2 - T_1$) is signal transmission time from UE2 to UE1, provided that UE2 sends signal to UE1 at T_2 and the signal arrives at UE1 at T_{21} , wherein T_{21} should overlap with T_1 so as to guarantee the useful signal S3 and interference signal I4 can arrive at UE1 at the same time.

30 Then, UE1 estimates the TA by estimating the channel impulse response of each midamble transmitted by UE2, and includes the estimated TA as synchronization shift information in the traffic burst from UE1 to UE2. The traffic

burst contains the midamble to be used for estimating the TA, so UE1 and UE2 can estimate and adjust signal transmission TA any time, even if the two UEs are both in mobility.

5 The above conventional downlink synchronization procedure addressing direct link can be summarized as follows:

(1) UE1 and UE2 establish and maintain downlink synchronization with the UTRAN respectively

UE1 and UE2 establish downlink synchronization during cell search, and maintain downlink synchronization by tracking the pilot channel (step 1).

10 (2) UE2 determines its transmitting time

UE2 sets time T2 as its transmitting time for transmitting signals to UE1 in associated downlink timeslot during direct link establishment procedure (step 2).

(3) UE1 measures the time difference between direct link signal and downlink signal

15 During direct link establishment procedure, when receiving the traffic burst transmitted by UE2 at T2, UE1 measures the time difference of $T_{\text{UTRAN-UE2}} + T_{\text{UE2-UE1}} - T_{\text{UTRAN-UE1}}$ ($T2 - T1$) according to the midamble information contained in the traffic burst, and transmits the measurement result as feedback information to UE2 (step 3).

20 (4) UE2 sets its transmission TA

UE2 sets its transmission TA according to the feedback information from UE1 and adjusts its time to transmit signals according to this TA (step 4).

(5) UE1 estimates and sends synchronization shift information to UE2

25 UE1 estimates the synchronization shift information by evaluating the channel impulse response of each midamble from UE2 and sets the synchronization shift information in the traffic burst to be transmitted from UE1 to UE2 (step 5).

(6) UE2 adjusts its transmission TA

UE2 adjusts its transmission TA according to the synchronization shift information included in the traffic burst from UE1 (step 6).

30 (7) Iterate step 5 and step 6

Judge whether P2P communication is ended (step 7). If the direct communication is not ended yet, the above step 5 and step 6 will be iterated

continuously to keep direct link signal S3 to be synchronized with the associated downlink signal I4, so long as the direct link still shares the same timeslot as the downlink timeslot.

5 Through the above steps, the useful signal S3 from UE2 and interference signal I4 from the UTRAN can arrive at UE1 at the same time, to guarantee that UE1 can use MUD or JD algorithms to cancel downlink interference signal I4 and then to guarantee the performance of P2P-enabled TDD CDMA systems, with downlink synchronization and the acquired spreading code allocation information.

10 Of course, in the case when two UEs in direct communication mode are very close to each other, i.e.: when the receiving time points T1 and T2 are nearly equal, the time difference between direct link signal S3 and downlink signal I4 arriving at UE1 can almost be ignored. At this time, the above synchronization procedure can be omitted, and only spreading code allocation information is needed. UE1 can cancel the negative effect caused by interference signal I4
15 through JD.

Moreover, it should be noted that setting and adjusting the transmission TA by UE2 can only guarantee that the useful signal S3 and interference signal I4 arrive at UE1 at the same time, but can't guarantee that the useful signal S4 and interference signal I3 in Fig. 4 arrive at UE3 at the same time, thus UE3's receiver
20 can't effectively cancel the effect caused by interference signal I3 in UE3 (or cancel I3's effect based on increasing complexity by using asynchronous JD method) according to the acquired spreading code allocation information. Fortunately, in practical communications, when UE3 extracts the desired information from S4 by using conventional synchronous JD method, its most
25 interferences are from the received mixed signal S4, and interference signal I3's effect to the useful signal S4 can be ignored at this time.

The above method for supporting P2P communication in downlink timeslot in TD-SCDMA systems as proposed in the present invention, can be implemented in computer software, or hardware, or in combination of both software and hardware.
30

Beneficial Results of the Invention

As described above, referring to the method and apparatus for supporting

P2P communication in TD-SCDMA systems provided in the present invention, a UE in direct communication mode can acquire spreading code allocation information via downlink, thus the UE can effectively cancel the interference caused by the downlink signals transferred in the same timeslot in conventional communication, by utilizing the spreading code allocation information used by
5 other UEs allocated in the same downlink timeslot, with methods like MUD or JD.

Furthermore, referring to the method and apparatus for supporting P2P communication in TD-SCDMA systems provided in the present invention, some steps are adopted to keep direct link signals and downlink signals in the associated timeslot synchronized, which greatly simplifies the operation of the UE
10 to cancel downlink signal interference according to the spreading code allocation information, and simplifies the hardware setting of the UE's receiver.

Although the method and apparatus for supporting P2P communication in TD-SCDMA systems provided in the invention has been shown and described with respect to exemplary embodiments of TD-SCDMA, it should be understood by
15 those skilled in the art that the communication method and apparatus are not limited hereof, but also suitable to other TDD CDMA systems.

It is also to be understood by those skilled in the art that the method and apparatus for supporting P2P communication in TD-SCDMA systems disclosed in
20 this invention can be modified considerably without departing from the spirit and scope of the invention as defined by the appended claims.

What is claimed is:

1. A method for supporting P2P (Peer to Peer) communication between two user equipments in TDD CDMA systems, performed by user equipment,
5 comprising:
 - receiving signals transferred via the downlink control channel by network system;
 - acquiring the timeslot allocation information according to the received signals;
 - 10 acquiring the spreading code allocation information of other active user equipments allocated in the specific downlink timeslot associated with the direct link used by said user equipments, according to the received signals; and
 - 15 reducing the interference caused by signals transferred via downlink from network system to said other user equipments during P2P communication according to the acquired timeslot allocation information and spreading code allocation information.
- 20 2. The communication method according to claim 1, wherein said spreading code allocation information at least includes the said spreading code information being used by other user equipments in said downlink timeslot.
- 25 3. The communication method according to claim 1 or 2, wherein said step of reducing the interference includes executing at least one of the methods Multi-User Detection (MUD) and Joint Detection (JD).
- 30 4. The communication method according to claim 3, wherein at least one of said methods Multi-User Detection (MUD) and Joint Detection (JD) utilizes said spreading code information being used by other user equipments in said downlink timeslot to reduce interference.
5. The communication method according to claim 4, further comprising:

establishing downlink synchronization with network system at the cell search phase, and keeping downlink synchronization with network system by tracking the pilot channel;

5 In said downlink timeslot, when said user equipments transmitting signals via said direct link, the steps taken by said user equipment comprises:

(i) during establishing said direct link, setting the time of transmitting signals to the other user equipment in said downlink timeslot, according to the received
10 time of transmitting signals by network system;

(ii) transmitting test signals to the other user equipment at said set time in said downlink timeslot;

(iii) receiving feedback signal from the other user equipment, which is the time difference obtained by comparing the time at which the other user equipment receives the test signals and the received time at which the network system transmits signals in the other user equipment, after the other user equipment receiving said test signals;
15

(iv) setting the time advance for transmitting signals to the other user equipment according to the feedback signals; and
20

(v) adjusting the time at which the user equipment transmits signals to the other user equipment according to time advance, in order that the signals of downlink from network system, which are received by the other user equipment, are synchronized with the signals of said direct link from the user equipment.
25

6. The communication method according to claim 5, further includes:
30

(vi) transmitting the P2P communication signals to said the other user equipment at said adjusted time for transmitting;

(vii) receiving the synchronization shift information from said the other user equipment, which is the synchronization derivation estimated according to received the P2P communication signals in said the other user equipment after
5 receiving said P2P communication signals; and

(viii) adjusting the timing advance for transmitting signals to the other user equipment according to the synchronization shift information.

10 7. The communication method according to claim 5 or 6, further includes:

adjusting the time at which the user equipment transmits signals to the other user equipment during the P2P communication procedure, according to the synchronization shift information from the other user equipment, in order that the
15 P2P communication signals transmitted by the user equipment and the downlink signals transmitted by network system can reach the other user equipment at the same time.

20 8. The communication method according to claim 5,6 or 7 wherein when the user equipment receives signals via said direct link in said downlink timeslot, the step to be taken includes:

(a) calculating the difference between the time for receiving the test signals transmitted from the other user equipment and the time for receiving the signals transmitted from network system, and sends the calculated time difference as
25 feedback signals to the other user equipment, when receiving test signals transmitted by said the other user equipment, during the process of establishing said direct link.

30 9. The communication method according to claim 8, wherein when the user equipment receives signals via said direct link in said downlink timeslot, the step to be taken further includes:

(b) estimating the synchronization shift information of the other user equipment according to the received P2P communication signals when the UE receives the P2P communication signals transmitted by the other user equipment, and sending
5 the estimated synchronization shift information to the other one, during the process of establishing the said direct link.

10. The communication method according to claim 8 or 9, further includes:

10 calculating the synchronization shift information of the other user equipment according to the received P2P communication signals from said the other user equipment, and sending the synchronization shift information to the other one, during the process of P2P communication.

15 11. A method for supporting P2P communication between two user equipments in TDD CDMA systems, the steps taken by network system comprising:

20 sending the timeslot allocation information to the two users equipment
conducting P2P communication via downlink control channel;

generating spreading code allocation information corresponding to each
downlink timeslot of timeslot allocation information; and

25 sending said spreading code allocation information to the two user equipments
via downlink control channel respectively, in order to synchronize the P2P
communication signals received by each of the two UE with the signals from
network system.

30 12. The communication method according to claim 11, wherein said spreading
code allocation information at least includes spreading code information being
used by other user equipments in said downlink timeslot.

13. A user equipment for supporting P2P (Peer to Peer) communication in TDD CDMA systems, comprising:

- 5 a signal transceiver, for receiving and transmitting radio signals;
 a timeslot allocation information acquiring means for acquiring the timeslot allocation information according to the information transferred via downlink control channel;
- 10 a spreading code allocation information acquiring means for acquiring the spreading code allocation information of other active user equipments in a specific downlink timeslot which is used when the UE is receiving signals via the direct link between the UE and the other one, according to the information transferred via downlink control channel; and
- 15 a interference reducing means for reducing the interference caused by downlink signals transmitted from network system to other user equipments during P2P communication process according to the acquired timeslot allocation information and spreading code allocation information.
- 20 14. The user equipment according to claim 13, wherein said spreading code allocation information at least includes the spreading code information being used by other user equipments in said downlink timeslot.
- 25 15. The user equipment according to claim 13 or 14, wherein said interference reducing means executes at least one of the methods Multi-User Detection (MUD) and Joint Detection (JD) to reduce interference.
- 30 16. The user equipment according to claim 15, wherein one of said methods Multi-User Detection (MUD) and Joint Detection (JD) reduce interference by using said spreading code information being used by other user equipments in said downlink timeslot.

17. The user equipment according to claim 16, further including:

5 a synchronization means, for establishing downlink synchronization with network system at the cell search phase, and keeping downlink synchronization with the network system by tracking the pilot channel;

10 a transmitting time setting means, for setting the time for transmitting signals to the other user equipment in said downlink timeslot, according to the time for receiving the transmitting signals from the network system, in the process of establishing the said direct link;

15 a test signals transmitting means, for transmitting test signals to the other user equipment at the set time in said downlink timeslot;

20 a feedback signal receiving means, for receiving feedback signals from the other user equipment, which is the time difference obtained by comparing the time for receiving test signals and the time for receiving the transmitting signals from the network system in the other user equipment, after the other user equipment receiving the test signals;

a time advance setting means for setting the time advance for transmitting signals to the other user equipment; and

25 a transmitting time adjusting means based on said feedback signals, for adjusting the transmitting time at which the user equipment transmits signals to the other user equipment according to the time advance, in order that the signals transferred via downlink from network system, which are received by the other user equipment, are synchronized with the signals transferred via said direct link
30 from said user equipment.

18. The user equipment according to claim 17, further includes:

a synchronization shift information receiving means, for receiving the synchronization shift information from said the other user equipment, which is the synchronization derivation estimated by the other user equipment after receiving
5 P2P communication signals, according to the received P2P communication signals;
and

a transmitting time adjusting means based on synchronization shift information,
for adjusting the timing advance for transmitting signals to said the other user
10 equipment according to said synchronization shift information.

19. The user equipment according to claim 17 or 18, further includes:

a feedback signals generating means, for calculating the difference between
15 the time for receiving test signals and the time for receiving signals transmitted
from network system, and sending the calculated difference as feedback signals to
the other user equipment when receiving the test signals transmitted by the other
user equipment, during the process of establishing said direct link.

20 20. The user equipment according to claim 19, further includes:

a synchronization shift information generating means, for estimating the
synchronization shift information of the other user equipment according to the P2P
communication signals when the UE receives P2P communication signals
25 transmitted by said the other user equipment, and sending the estimated
synchronization shift information to the other one.

21. A network system for supporting P2P communication between two user
equipments in TDD CDMA systems, comprising:

30

a timeslot allocation information sending means for sending the timeslot allocation information to the two user equipments in P2P communication via downlink control channel;

5 a spreading code allocation information generating means for generating the spreading code allocation information corresponding to each downlink timeslot in the timeslot allocation information; and

10 a spreading code allocation information sending means for sending the spreading code allocation information to the two user equipments via downlink control channel respectively, so as to synchronize the P2P communication signals received by each of the two UEs with signals from network systems.

15 22. The network system according to claim 21, wherein said spreading codes allocation information at least contains the spreading code information being used by user equipments in said downlink timeslot.

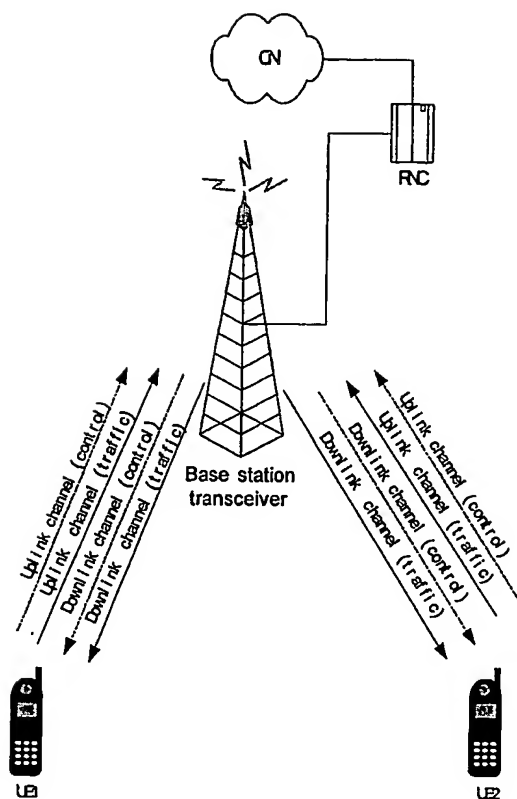


Fig. 1

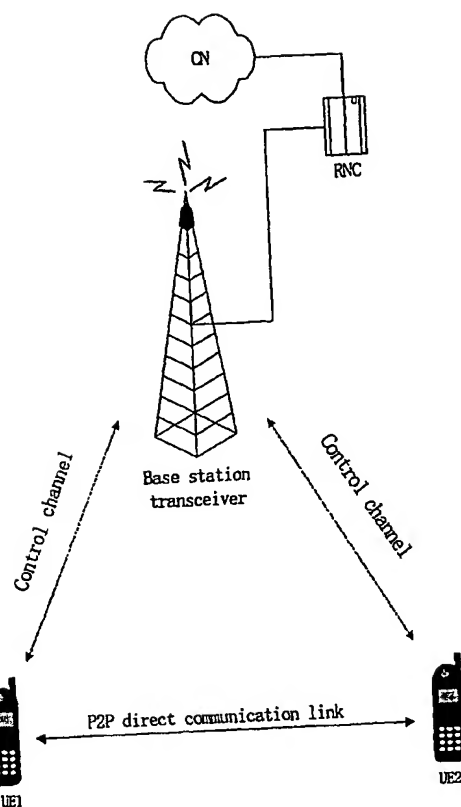


Fig. 2

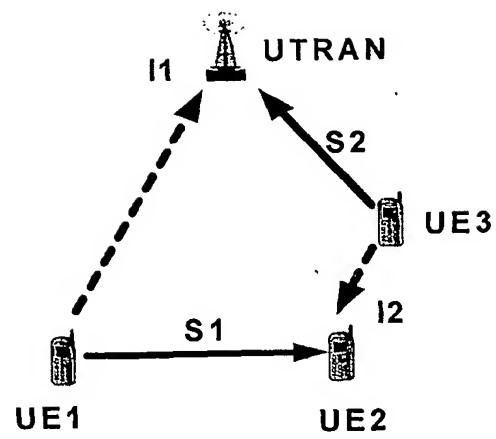


Fig. 3

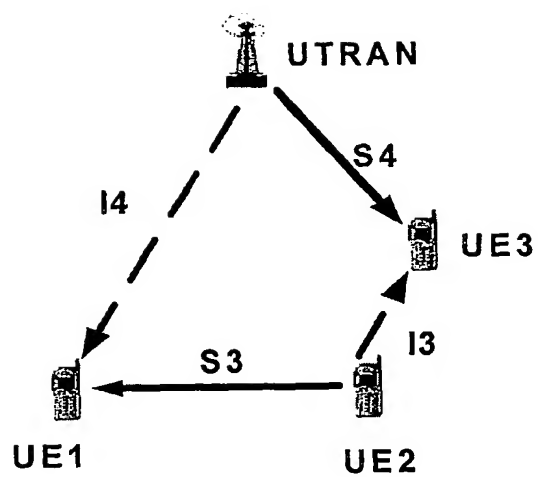


Fig. 4

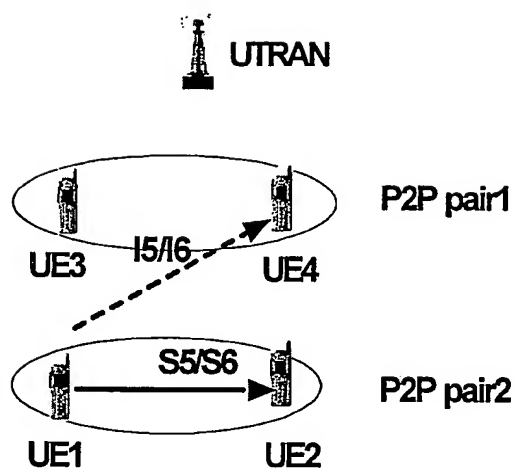


Fig. 5

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
	TS0	TS1	TS2	TS3	TS4	TS5	TS6

Fig. 6

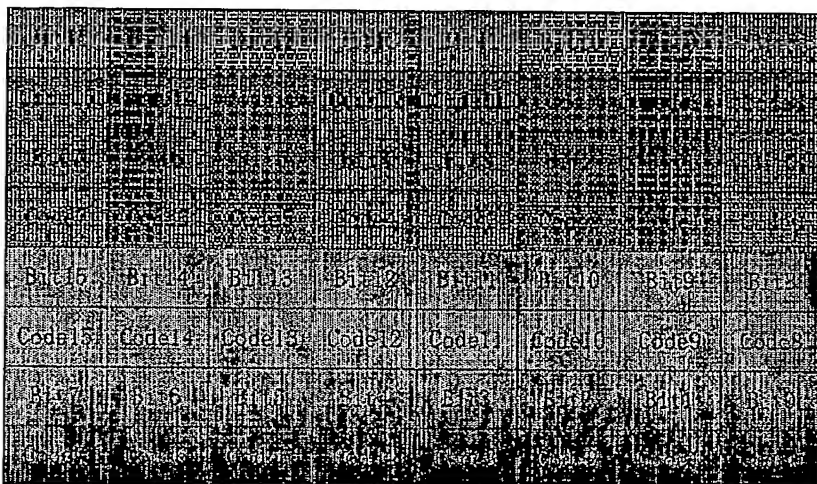


Fig. 7

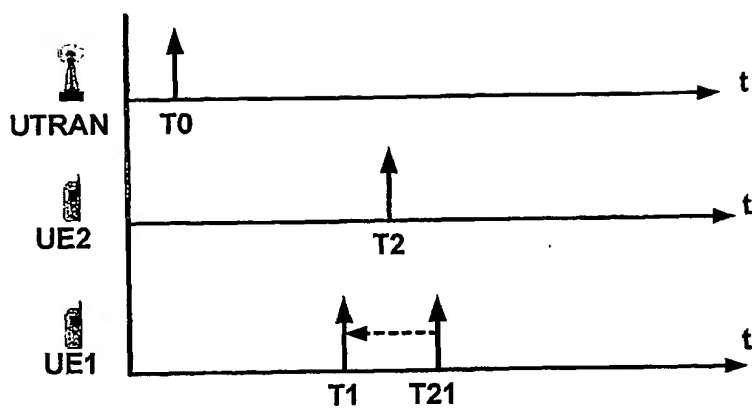


Fig. 8

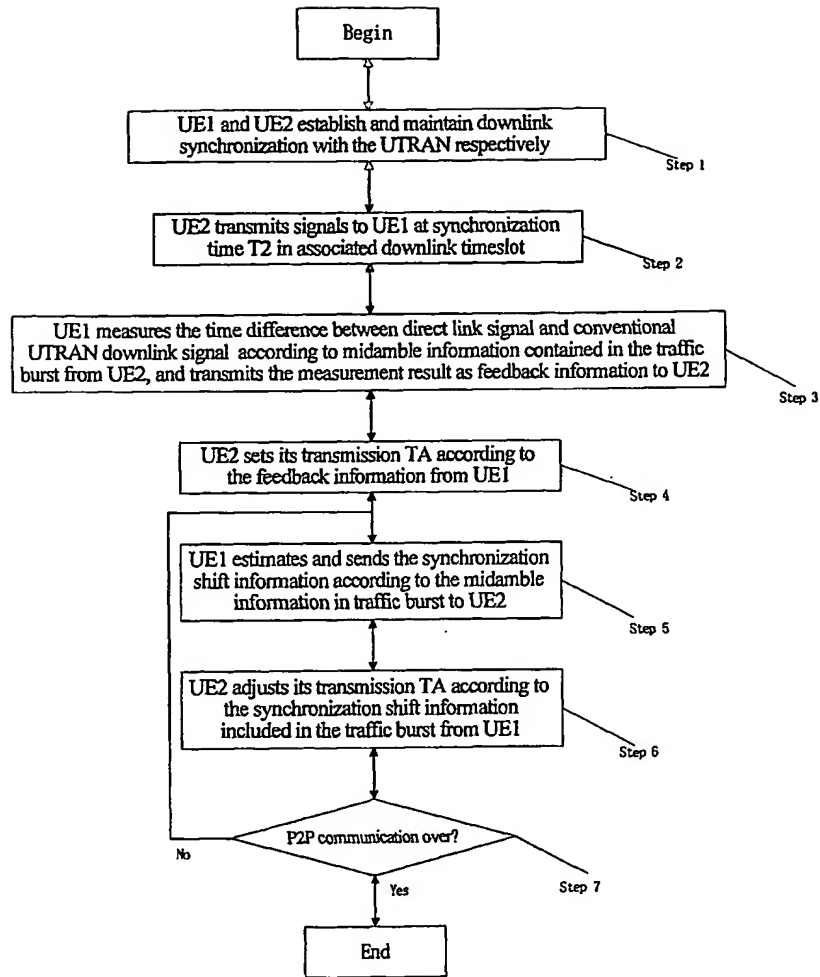


Fig. 9

INTERNATIONAL SEARCH REPORT

ational Application No
/IB2004/050354

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/36 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01/01717 A (ERICSSON TELEFON AB L M) 4 January 2001 (2001-01-04) abstract page 4 pages 9-12 pages 14-15; figures 7a-9 -----	1-22
X	US 5 636 243 A (TANAKA SYOICHI) 3 June 1997 (1997-06-03) abstract columns 1-2,5-6; figure 1 -----	1-22
X	US 5 995 844 A (FUKUDA KUNIO) 30 November 1999 (1999-11-30) abstract columns 1,4,6,8; figure 4 -----	1,11
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 July 2004

Date of mailing of the international search report

28/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Englund, T

INTERNATIONAL SEARCH REPORT

ational Application No

/IB2004/050354

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 459 690 B1 (DELPRAT MARC ET AL) 1 October 2002 (2002-10-01) columns 1-4	1,11
A	----- "3rd Generation Partnership Project; Technical Specification Group Radio Access Network; Synchronisation in UTRAN Stage 2 (Release 5); 3GPP TS 25.402 V5.1.0" 3GPP TS 25.402 V5.1.0, XX, XX, June 2002 (2002-06), pages 1-46, XP002261398 pages 30-35	
A	----- US 6 321 095 B1 (GAVETTE SHERMAN) 20 November 2001 (2001-11-20) abstract columns 2,4-6	

INTERNATIONAL SEARCH REPORT

International Application No

/IB2004/050354

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0101717	A	04-01-2001	US 6574266 B1 AU 5972500 A BR 0011890 A CN 1371583 T WO 0101717 A1 EP 1190592 A1 JP 2003503920 T	03-06-2003 31-01-2001 05-03-2002 25-09-2002 04-01-2001 27-03-2002 28-01-2003
US 5636243	A	03-06-1997	JP 8019041 A GB 2290677 A , B	19-01-1996 03-01-1996
US 5995844	A	30-11-1999	JP 10013324 A CN 1173796 A	16-01-1998 18-02-1998
US 6459690	B1	01-10-2002	FR 2737379 A1 AT 242584 T CA 2182223 A1 DE 69628508 D1 DE 69628508 T2 EP 0756432 A2 JP 9153874 A	31-01-1997 15-06-2003 28-01-1997 10-07-2003 29-04-2004 29-01-1997 10-06-1997
US 6321095	B1	20-11-2001	AU 3907000 A WO 0059138 A1	16-10-2000 05-10-2000